SIX 24V

JOKERLIGHT®

DIMENSIONS

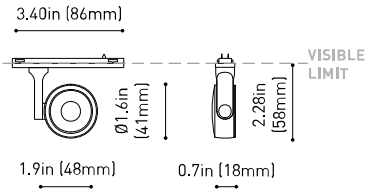

ACCESORIES

MINIMAL TRACK OPTIONS

PRODUCT

Name	SIX XS 24V UL 34º 3000K WT
Reference	U3890031WT
Color	Textured white
Category	TRACKLIGHTS

LIGHT SOURCE

Type	LED
Gross luminous flux	420 Lm
Color temperature	3000 K
Chromatic stability	MacAdam Step 2
Color Rendering Index	CRI>90
Power	3.5 W
Current	400 mA
Efficacy	120 Lm/W
LED lifespan	L80B10 >60.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	88%
Light beam angle	34°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included
Power values of the system	4,00 W
Dimming	No Dim

OTHER DATA

Environmental location	DRY
Track type	Minimal Track
Weight	0.12 lb | 55 gr
Packaged weight	0.19 lb | 85 gr
Packaging dimensions	4.41x3.5x1.02 in | 112x89x26 mm
Units per package	1
Materials	Aluminium / Polycarbonate

Intertek

AWARDS

reddot winner 2020 innovative product

reddot winner 2020 lighting design

Bronze Delta ADI Awards 2020

HONORABLE MENTION EUROPEAN PRODUCT DESIGN AWARD

FX INTERNATIONAL INTERIOR DESIGN AWARDS WINNER 2020

archiproducts DESIGN AWARDS WINNER 2020

**US product only. Not available in Canada. Six XS 24V is a projector for the Minimal Track system that stands out for its lightness and elegance. Its body; disk looking, rounded shaped, encloses an innovative combination of reflector and lens. The combined action of both, allows Six to direct light rays with the maximum uniformity in a very small distance that, at the same time, has made possible its differential design-reduced and minimalist-.

JOKERLIGHT LLC
2750 NW 84th Ave · Doral · FL 33122 (USA)
info@jokerlight.com · www.jokerlight.com

24-04-24 / 16:53

5 Year WARRANTY*

POLAR DIAGRAM

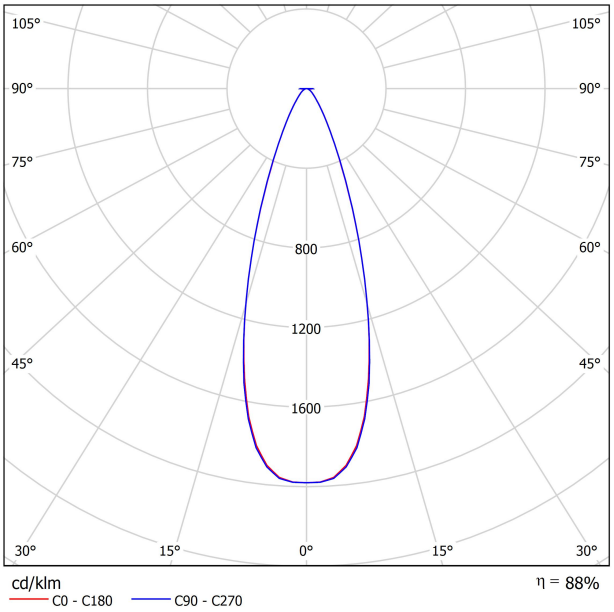

CONICAL DIAGRAM

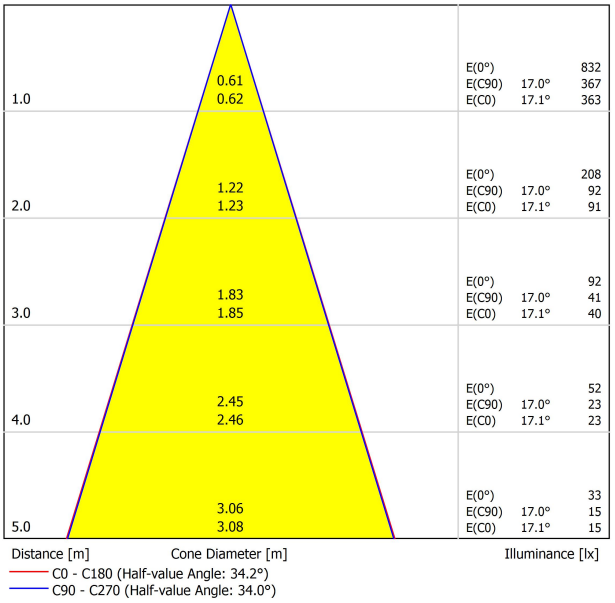

24V SYSTEM

MINIMAL TRACK



MINIMAL TRACK 24V Profile 2m UL — **U384-02-00- | N |**

2m = 78.74in



MINIMAL TRACK 24V Rubber Cable n x 1m UL — **U384-00-01- | N |**

n = Total Lenght of System
1m = 39.37in

24 V | Max. 4A

MINIMAL TRACK 24V Corner 90º 1 Plane UL

U384-00-02- | N |

Cable Lenght = 1.38in (35mm)



MINIMAL TRACK 24V Corner 90º 1 Plane Rounded UL

U384-00-03- | N |

Cable Lenght = 1.38in (35mm)



MINIMAL TRACK 24V Corner 90º 2 PLanes UL

U384-00-04- | N |

Cable Lenght = 3.94in (100mm)



MINIMAL TRACK 24V End Cap UL

U384-00-05- | N |

MINIMAL TRACK 24V Connection Box UL

U384-00-06- | N |



		P	V	D (A x B x C)
MINIMAL TRACK 24V Remote Power Supply UL	**U384-00-07**	100W	24V	8.16 x 2.97 x 1.30in 207.2 x 75.4 x 33mm

120 & 277 V | 50/60 Hz



UL DROP VOLTAGE TABLE

		CABLE LENGHT		
		<16.40ft <5m	<32.80ft <10m	<65.62ft <20m
POWER	**CABLE SECTION**	**TRACK LENGHT**		
96W	AWG18	65.62ft 20m	32.81ft 10m	X
	AWG16	65.62ft 20m	65.62ft 20m	32.81ft 10m

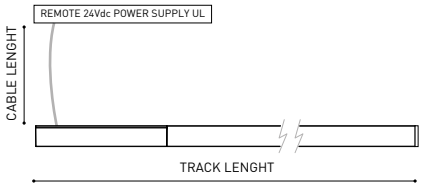

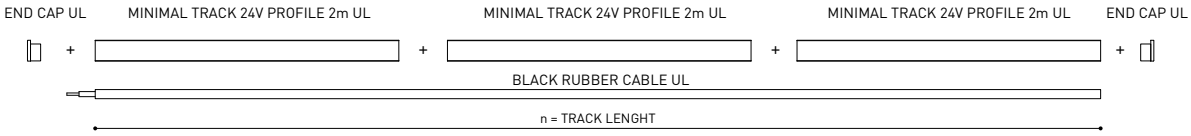

COLOUR | N ■ |

INSTALLATION GUIDE
https://youtu.be/AqTlsTcSoGA

DIM OPTIONS PLEASE CONSULT

24V SYSTEM

MINIMAL TRACK SUSPENSION





MINIMAL TRACK 24V Suspension UL

Profile 2m

U384-02-00- | N |

Profile 2m Initial feed kit UL

U400-02-10- | N |

Profile 2m Middle feed kit UL*

U400-02-20- | N |

* Unidirectional Middle Feed
2m = 78.74in



MINIMAL TRACK 24V Suspension Corner 90º UL

U400-00-03- | N |

Cable Lenght = 3.35in (85mm)



MINIMAL TRACK 24V Suspension UL

Rubber Cable n x 1m UL — U400-00-01- | N |

n = Total Lenght of System
1m = 39.37in

24 V | Max. 4A

MINIMAL TRACK 24V Suspension Straight Joiner UL

U400-00-02- | N |



MINIMAL TRACK 24V Suspension Kit UL

U400-02-04- | N |



MINIMAL TRACK 24V Suspension End Caps UL

U400-00-05- | N |

Two End Caps Included

		P	V	D (A x B x C)
MINIMAL TRACK 24V Remote Power Supply UL	U384-00-07	100W	24V	8.16 x 2.97 x 1.30in 207.2 x 75.4 x 33mm



120 & 277 V | 50/60 Hz

UL DROP VOLTAGE TABLE

		CABLE LENGHT		
		<16.40ft <5m	<32.80ft <10m	<65.62ft <20m
POWER	CABLE SECTION	TRACK LENGHT		
96W	AWG18	65.62ft 20m	32.81ft 10m	X
	AWG16	65.62ft 20m	65.62ft 20m	32.81ft 10m

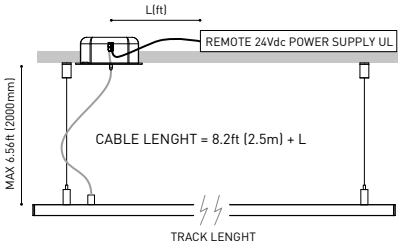

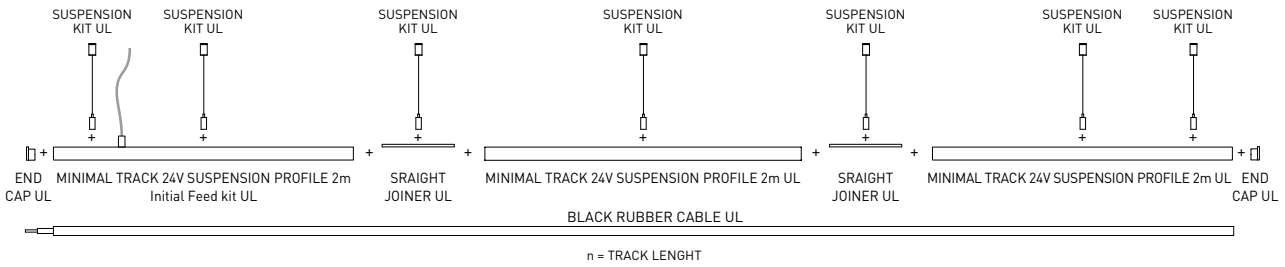

COLOUR | N ■ |

DIM OPTIONS PLEASE CONSULT