


# BLACK FOSTER MICRO SURFACE

JOKERLIGHT®



## DIMENSIONS

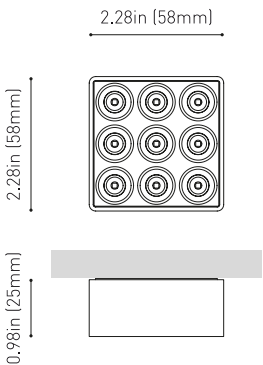

|           |  |
|-----------|--|
| Name      | BLACK FOSTER MICRO SURFACE 3X3 UL 2700K WT |
| Reference | U4594000WT                                 |
| Color     | Textured white                             |
| Category  | SURFACE                                    |

## PRODUCT

|                       |                                      |
|-----------------------|--------------------------------------|
| Type                  | LED                                  |
| Gross luminous flux   | Depending on Mounting Accessories Lm |
| Color temperature     | 2700 K                               |
| Chromatic stability   | MacAdam Step 3                       |
| Color Rendering Index | CRI>90                               |
| Power                 | Depending on Mounting Accessories W  |
| Current               | Depending on Mounting Accessories mA |
| LED lifespan          | L90B10 >60.000h                      |

## LIGHT SOURCE

|                     |     |
|---------------------|-----|
| Lighting efficiency | 87% |
| Light beam angle    | 37° |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                            |                                   |
|----------------------------|-----------------------------------|
| Driver                     | Requires remote driver            |
| Power values of the system | W                                 |
| Frequency                  | Depending on Mounting Accessories |
| Dimming                    | Depending on Mounting Accessories |

## LIGHTING FIXTURE | ELECTRICAL DATA

|                        |   |
|------------------------|---|
| Environmental location | DAMP  |
| Weight                 | 0.22 lb   100 gr  |
| Packaged weight        | 0.28 lb   131.1 gr  |
| Packaging dimensions   | 5.12x3.46x1.3 in   130x88x33 mm                             |
| Units per package      | 1   |
| Materials              | Aluminium - Acrylonitrile Butadiene Styrene - Polycarbonate |


## OTHER DATA




Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence. The downlight retains high levels of shielding, taking lighting comfort to another level as regards miniaturisation.



POLAR DIAGRAM

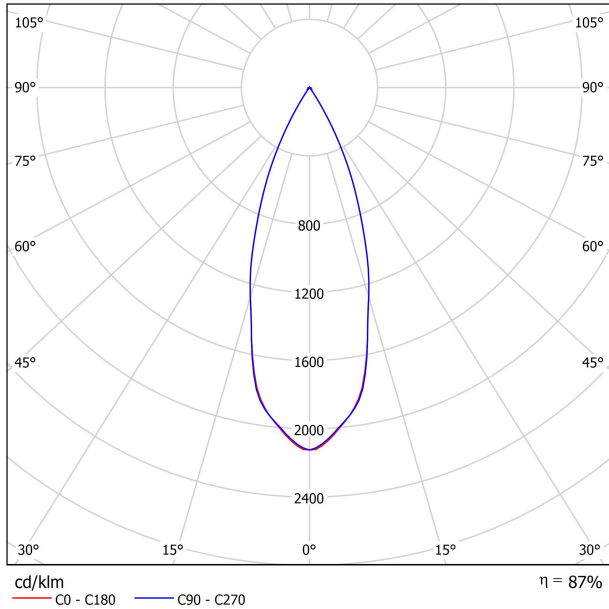

CONICAL DIAGRAM

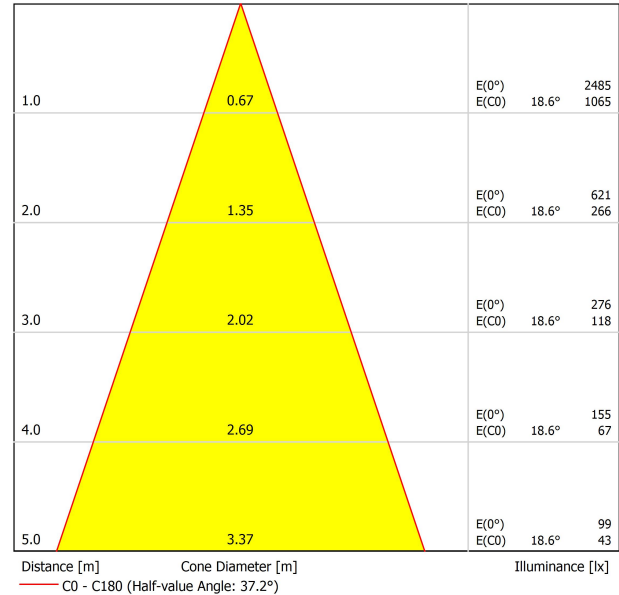

UGR

| Glare Evaluation According to UGR                                |     |   |      |      |      |      |  |      |      |      |      |
|--|-----|---|------|------|------|------|--|------|------|------|------|
| p Ceiling  |     | 70  | 70   | 50   | 50   | 30   | 70   | 70   | 50   | 50   | 30   |
| p Walls  |     | 50  | 30   | 50   | 30   | 30   | 50   | 30   | 50   | 30   | 30   |
| p Floor  |     | 20  | 20   | 20   | 20   | 20   | 20   | 20   | 20   | 20   | 20   |
| Room Size<br>X Y   |     | Viewing direction at right angles<br>to lamp axis |      |      |      |      | Viewing direction parallel<br>to lamp axis |      |      |      |      |
| 2H   | 2H  | -3.8  | -3.2 | -3.6 | -3.0 | -2.8 | -3.5                                       | -2.8 | -3.2 | -2.6 | -2.4 |
|  | 3H  | -0.9  | -0.3 | -0.6 | -0.1 | 0.1  | -0.5                                       | 0.1  | -0.2 | 0.3  | 0.6  |
|  | 4H  | 1.0   | 1.6  | 1.3  | 1.8  | 2.1  | 1.3  | 1.9  | 1.6  | 2.1  | 2.4  |
|  | 6H  | 2.8   | 3.3  | 3.1  | 3.6  | 3.9  | 3.2  | 3.7  | 3.5  | 4.0  | 4.3  |
|  | 8H  | 4.1   | 4.6  | 4.4  | 4.8  | 5.1  | 4.4  | 4.9  | 4.8  | 5.2  | 5.5  |
| 4H   | 12H | 5.4   | 5.8  | 5.7  | 6.1  | 6.4  | 5.9  | 6.3  | 6.2  | 6.6  | 6.9  |
|  | 2H  | -3.0  | -2.4 | -2.7 | -2.2 | -1.9 | -2.7                                       | -2.2 | -2.4 | -1.9 | -1.7 |
|  | 3H  | 0.3   | 0.8  | 0.7  | 1.1  | 1.4  | 0.6  | 1.0  | 0.9  | 1.3  | 1.6  |
|  | 4H  | 2.6   | 3.0  | 3.0  | 3.3  | 3.7  | 2.7  | 3.1  | 3.1  | 3.5  | 3.8  |
|  | 6H  | 4.5   | 4.9  | 4.9  | 5.2  | 5.6  | 4.8  | 5.2  | 5.2  | 5.5  | 5.9  |
| 8H   | 8H  | 5.9   | 6.2  | 6.3  | 6.6  | 7.0  | 6.2  | 6.4  | 6.6  | 6.8  | 7.2  |
|  | 12H | 7.3   | 7.5  | 7.7  | 7.9  | 8.3  | 7.7  | 8.0  | 8.2  | 8.4  | 8.8  |
|  | 4H  | 3.4   | 3.7  | 3.8  | 4.1  | 4.5  | 3.5  | 3.8  | 3.9  | 4.2  | 4.6  |
|  | 6H  | 5.6   | 5.8  | 6.1  | 6.3  | 6.7  | 5.9  | 6.1  | 6.4  | 6.5  | 7.0  |
|  | 8H  | 7.1   | 7.3  | 7.6  | 7.8  | 8.2  | 7.4  | 7.5  | 7.8  | 8.0  | 8.4  |
| 12H  | 12H | 8.8   | 8.9  | 9.3  | 9.4  | 9.9  | 9.2  | 9.3  | 9.7  | 9.8  | 10.3 |
|  | 4H  | 3.6   | 3.9  | 4.1  | 4.3  | 4.7  | 3.7  | 3.9  | 4.1  | 4.3  | 4.8  |
|  | 6H  | 6.0   | 6.2  | 6.5  | 6.6  | 7.1  | 6.2  | 6.4  | 6.7  | 6.8  | 7.3  |
|  | 8H  | 7.6   | 7.8  | 8.1  | 8.2  | 8.7  | 7.8  | 8.0  | 8.3  | 8.4  | 8.9  |
| Variation of the observer position for the luminaire distances S |     |   |      |      |      |      |  |      |      |      |      |
| S = 1.0H   |     | +5.5 / -3.3                                       |      |      |      |      | +5.4 / -3.1                                |      |      |      |      |
| S = 1.5H   |     | +8.2 / -3.6                                       |      |      |      |      | +8.1 / -3.5                                |      |      |      |      |
| S = 2.0H   |     | +10.3 / -4.1                                      |      |      |      |      | +10.2 / -3.9                               |      |      |      |      |
| Standard table   |     | BK02  |      |      |      |      | BK02                                       |      |      |      |      |
| Correction<br>Summand  |     | -7.5  |      |      |      |      | -7.4                                       |      |      |      |      |
| Corrected Glare Indices referring to 1170lm Total Luminous Flux  |     |   |      |      |      |      |  |      |      |      |      |