




### DIMENSIONS




### ACCESORIES

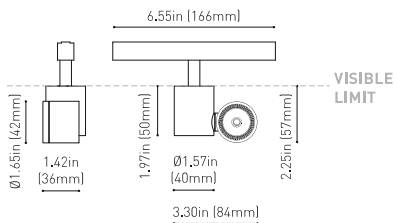

BEAM MIXER DIFFUSER



ANTI-GLARE HONEYCOMB LOUVER



TRACK 48V OPTIONS

### AWARDS

Silver Delta  
ADI Awards  
2016DESIGN  
AWARD  
2017PREMIO  
ADCV 2017  
OROGOOD  
DESIGN

### PRODUCT

Name IO 48V UL DIM 0-10V 20° 3000K NTW

Reference U3480111NTW

Color Textured black - White track

Category TRACKLIGHTS

### LIGHT SOURCE

Type LED

Gross luminous flux 505 Lm

Color temperature 3000 K

Chromatic stability MacAdam Step 2

Color Rendering Index CRI&gt;90

Power 4.5 W

Efficacy 112 Lm/W

LED lifespan L90B10&gt;55.000h

### LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency 92%

Delivered luminous flux 465 Lm

Light beam angle 20°

### LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system 5,00 W

Dimming 0-10V

### OTHER DATA

Environmental location DAMP

Swivel angle 325°

Rotation angle 355°

Track type Track 48V

Weight 0.34 lb | 155 gr

Packaged weight 0.49 lb | 225 gr


Packaging dimensions 7.40x6.49x2.08 in | 188x165x53 mm

Materials Aluminium - Polycarbonate




iO 48V is a LED spotlight miniaturised in a fixture that is so small that it fits on the palm of your hand. Designed for accent lighting applications, its small dimensions mean it can be fitted in display cabinets, shop windows and small places without generating an invasive presence on the scene. Created to be placed on a track, it offers all the features of concentrated LED spotlights with a minimalist and hyper-reduced design.

POLAR DIAGRAM

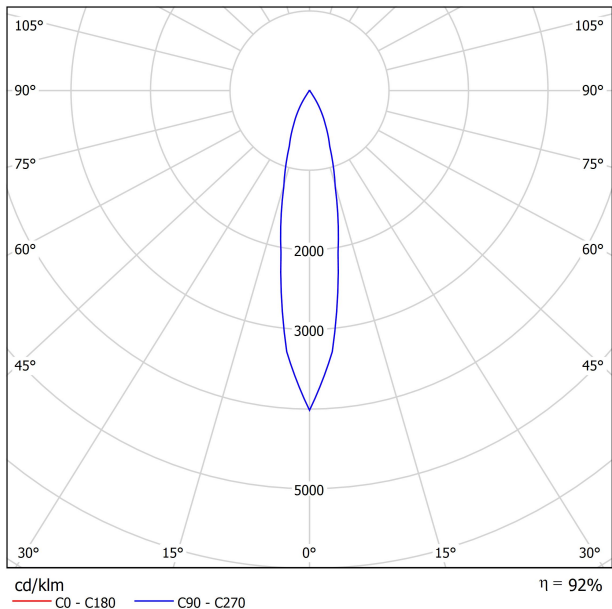

CONICAL DIAGRAM

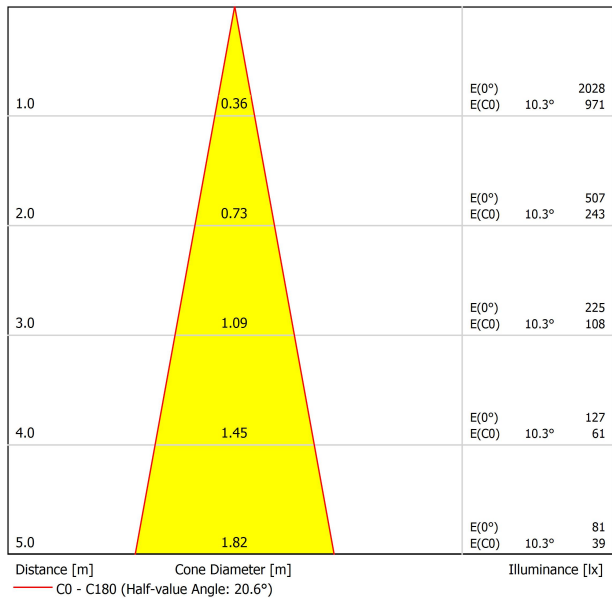




	PRODUCT
Model	Beam Mixer Diffuser
Reference	0805-01-00
Category	Accessories

NOT SOLD SEPARATELY  
AFFECTS THE LIGHTING PARAMETERS

The Beam Mixer Diffuser is used to smooth beam artifacts caused by parabolic, Fresnel, or TIR lens collimators without significant broadening.

The unique mixing design provides superior far-field smoothing and color mixing with high on-axis brightness. Compared with traditional diffusers, it maintains higher central beam candlepower (CBCP), and produce less undesirable "field light" at higher angles.



	<b>PRODUCT</b>
<b>Model</b>	Anti-glare Honeycomb Louver
<b>Reference</b>	0806-00-00   WT   NT
<b>Colour</b>	<b>WT</b> <input type="checkbox"/> Textured white   <b>NT</b> <input type="checkbox"/> Textured black
<b>Category</b>	Accessories
	NOT SOLD SEPARATELY AFFECTS THE LIGHTING PARAMETERS 

Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



TRACK 48V TRIMLESS UL

TRACK 48V TRIMLESS 3.28ft (1m) UL	U338-01-00-	N	WT
TRACK 48V TRIMLESS 6.56ft (2m) UL	U338-02-00-	N	WT
TRACK 48V TRIMLESS Corner 90° One Plane UL	U338-06-00-	N	WT
TRACK 48V TRIMLESS Corner 90° Two Planes UL	U338-07-00-	N	WT

PLASTERBOARD CEILING MANDATORY THICKNESS 0.50in (12.5mm)  
RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING

TRACK 48V TRIMLESS  
Corner 90° One Plane UL



\*Electrical connection not included

TRACK 48V TRIMLESS  
Corner 90° Two Planes UL



\*Electrical connection not included


TRIMLESS INSTALLATION GUIDE  
<https://youtu.be/SVWNEfblfVY>



TRACK 48V SURFACE UL

TRACK 48V SURFACE 3.28ft (1m) UL	U338-11-00-	NT	WT
TRACK 48V SURFACE 6.56ft (2m) UL	U338-12-00-	NT	WT
TRACK 48V SURFACE Corner 90° One Plane UL	U338-14-00-	NT	WT

TRACK 48V SURFACE  
Corner 90° One Plane UL




\*Electrical connection not included



TRACK 48V SURFACE SHORT UL

TRACK 48V SURFACE SHORT 3.28ft (1m) UL	U338-21-00-	NT	WT
TRACK 48V SURFACE SHORT 6.56ft (2m) UL	U338-22-00-	NT	WT
TRACK 48V SURFACE SHORT Corner 90° One Plane UL	U338-24-00-	NT	WT

TRACK 48V SURFACE SHORT  
Corner 90° One Plane UL



\*Electrical connection not included



		P	V	D
<b>CONSTANT VOLTAGE LED POWER SUPPLY</b>	<b>U100-00-78</b>	96W	48V	8.16 x 2.97 x 1.30 in 207 x 75.4 x 33 mm

120 & 277 V | 50/60 Hz

UL DROP VOLTAGE TABLE

POWER	CABLE SECTION	CABLE LENGHT			
		16.40ft 5m	32.80ft 10m	65.62ft 20m	98.43ft 30m
96W	AWG 16	TRACK LENGHT			
		164ft 50m	164ft 50m	131.32ft 40m	82ft 25m

ALL 48V TRACK UL



**Live-End Connector 48V UL**  
U338-00-01- | N | W |



**L-JOINT Connector 48V UL**  
U338-00-12- | N | W |




**Corner 90° Connector One Plane 48V UL**  
U338-00-24- | N | W |

\*Not suitable for trimless version



**Central Connector 48V UL**  
U338-00-02- | N | W |



**Wireless Control 48V UL**  
U434-01-31- | N | W |  
Casambi/AAG Stucchi App



**Cover Gap 3,28 ft (1m) 48V UL**  
U338-00-30- | N |

TRIMLESS 48V UL



**Trimless T-Bracket 48V UL**  
U338-00-03



**Clamp for M6 ROD UL**  
U338-00-09  
\*See accessories quantities



**Trimless Long T-Bracket 48V UL**  
U338-00-04



**Track Clamp UL**  
U338-00-10  
\*See accessories quantities



**Trimless Straight Joiners 48V (2 units) UL**  
U338-00-05- | N | WT |




**Suspension Kit UL**  
U338-00-08  
\*See accessories quantities



**Trimless Plaster Installation Guard  
3.28ft (1m) 48V UL**  
U338-00-21

**\* SUGGESTED MOUNTING ACCESSORIES QUANTITIES**  
3.28ft (1000mm) - 2 Pcs.  
6.56ft (2000mm) - 3 Pcs.  
9.84ft (3000mm) - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V UL



**Surface Straight Joiner 48V UL**  
U338-00-11

TRIMLESS, SURFACE & SUSPENSION 48V UL



End 48V UL

U338-00-06- | NT | WT |



End feed 48V UL

U338-00-07- | NT | WT |

SURFACE SHORT & SUSPENSION SHORT 48V UL



Short End 48V UL

U338-00-18- | NT | WT |



Short End feed 48V UL

U338-00-19- | NT | WT |

SUSPENSION & SUSPENSION SHORT 48V UL



Suspension Kit 48V [2 units] UL

U338-00-15- | NT | WT |



Suspension feed Kit 48V UL

U338-00-17- | N | W |



DIM

\*For remote power supply