




DIMENSIONS



AWARDS

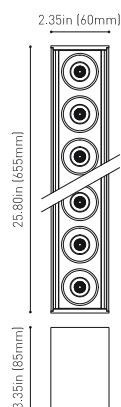

PRODUCT

| | |
|-----------|---|
| Name | BLACK FOSTER SURF 15 UL SPOT 2700K WTMG |
| Reference | U3206110WTMG |
| Color | Textured white-Metallized gold |
| Category | SURFACE |

LIGHT SOURCE

| | |
|-----------------------|-----------------|
| Type | LED |
| Gross luminous flux | 2850 Lm |
| Color temperature | 2700 K |
| Chromatic stability | MacAdam Step 3 |
| Color Rendering Index | CRI>90 |
| Power | 31.5 W |
| Current | 700 mA |
| Efficacy | 90 Lm/W |
| LED lifespan | L80B10 >60.000h |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|-------------------------|---------|
| Lighting efficiency | 90% |
| Delivered luminous flux | 2565 Lm |
| Light beam angle | 19° |

LIGHTING FIXTURE | ELECTRICAL DATA

| | |
|----------------------------|--|
| Driver | Included: ERP-PSB series or similar |
| Power values of the system | 37,00 W |
| Frequency | 50/60 Hz |
| Dimming | 0-10V / TRIAC/ELV dimming only at 120V |

OTHER DATA

| | |
|---------------------------------|---|
| Environmental location | DAMP |
| Junction box cover | Included. For octagonal Junction box |
| Junction box cover color | Textured white. Other finishing, please consult |
| Junction box cover measurements | Ø4.33 in Ø110 mm |
| Weight | 4.52 lb 2050 gr |
| Packaged weight | 6.48 lb 2940 gr |
| Packaging dimensions | Ø5.04x28.74 in Ø128x730 mm |
| Materials | Aluminium - Acrylonitrile Butadiene Styrene - Polycarbonate |




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM



CONICAL DIAGRAM

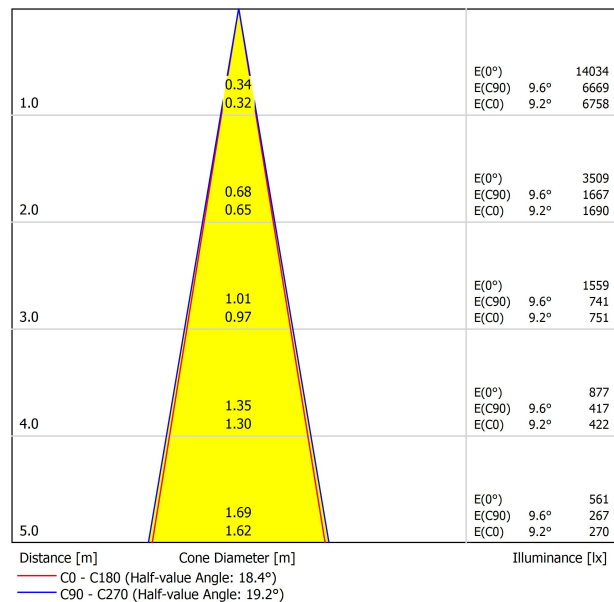

UGR

| Glare Evaluation According to UGR | | | | | | | | | | | | |
|--|-----|---|------|------|------|------|--|------|------|------|------|--|
| ρ Ceiling | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | | |
| ρ Walls | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | | |
| ρ Floor | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | | |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | | |
| 2H | 2H | 1.8 | 2.5 | 2.0 | 2.7 | 2.9 | 2.6 | 3.3 | 2.9 | 3.5 | 3.7 | |
| | 3H | 5.3 | 5.9 | 5.6 | 6.1 | 6.4 | 6.5 | 7.2 | 6.8 | 7.4 | 7.6 | |
| | 4H | 7.3 | 7.8 | 7.6 | 8.1 | 8.3 | 8.4 | 9.0 | 8.7 | 9.2 | 9.5 | |
| | 6H | 9.5 | 10.0 | 9.8 | 10.3 | 10.6 | 10.7 | 11.2 | 11.0 | 11.5 | 11.8 | |
| | 8H | 10.6 | 11.1 | 11.0 | 11.4 | 11.7 | 11.9 | 12.4 | 12.2 | 12.7 | 13.0 | |
| 4H | 12H | 12.0 | 12.5 | 12.4 | 12.8 | 13.1 | 13.3 | 13.8 | 13.7 | 14.1 | 14.4 | |
| | 2H | 3.2 | 3.7 | 3.5 | 4.0 | 4.3 | 3.7 | 4.3 | 4.0 | 4.5 | 4.8 | |
| | 3H | 6.9 | 7.4 | 7.2 | 7.7 | 8.0 | 7.8 | 8.2 | 8.1 | 8.5 | 8.9 | |
| | 4H | 9.0 | 9.4 | 9.3 | 9.7 | 10.1 | 9.8 | 10.2 | 10.2 | 10.5 | 10.9 | |
| | 6H | 11.3 | 11.6 | 11.7 | 12.0 | 12.4 | 12.2 | 12.6 | 12.6 | 12.9 | 13.3 | |
| 8H | 8H | 12.5 | 12.8 | 12.9 | 13.2 | 13.6 | 13.5 | 13.9 | 14.0 | 14.2 | 14.6 | |
| | 12H | 14.0 | 14.2 | 14.4 | 14.6 | 15.0 | 15.1 | 15.4 | 15.5 | 15.8 | 16.2 | |
| | 4H | 9.9 | 10.2 | 10.3 | 10.6 | 11.0 | 10.6 | 10.9 | 11.0 | 11.2 | 11.6 | |
| | 6H | 12.4 | 12.6 | 12.8 | 13.0 | 13.5 | 13.2 | 13.4 | 13.6 | 13.8 | 14.3 | |
| | 8H | 13.8 | 14.0 | 14.3 | 14.5 | 14.9 | 14.7 | 14.9 | 15.2 | 15.3 | 15.8 | |
| 12H | 12H | 15.5 | 15.6 | 15.9 | 16.1 | 16.6 | 16.5 | 16.6 | 16.9 | 17.1 | 17.6 | |
| | 4H | 10.2 | 10.5 | 10.6 | 10.9 | 11.3 | 10.7 | 11.0 | 11.2 | 11.4 | 11.8 | |
| | 6H | 12.8 | 13.0 | 13.2 | 13.4 | 13.9 | 13.4 | 13.6 | 13.9 | 14.1 | 14.6 | |
| | 8H | 14.3 | 14.5 | 14.8 | 14.9 | 15.4 | 15.1 | 15.3 | 15.6 | 15.7 | 16.2 | |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | | |
| S = 1.0H | | +0.2 / -0.1 | | | | | +0.2 / -0.1 | | | | | |
| S = 1.5H | | +0.3 / -0.3 | | | | | +0.3 / -0.3 | | | | | |
| S = 2.0H | | +0.5 / -0.5 | | | | | +0.5 / -0.5 | | | | | |
| Standard table | | --- | | | | | --- | | | | | |
| Correction | | --- | | | | | --- | | | | | |
| Summand | | --- | | | | | --- | | | | | |
| Corrected Glare Indices referring to 2850lm Total Luminous Flux | | | | | | | | | | | | |