




DIMENSIONS



ACCESSORIES

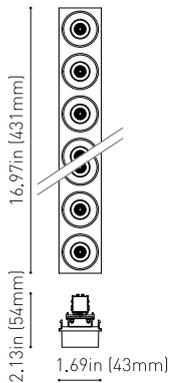

BLACK FOSTER CUSTOM
ACCESSORIES

Name	BLACK FOSTER CUSTOM MODULE 10 UL SPOT DIM DALI 3500K N
Reference	U4535123N
Color	Matt black
Category	CUSTOM SYSTEMS

PRODUCT

Type	LED
Gross luminous flux	2300 Lm
Color temperature	3500 K
Chromatic stability	MacAdam Step 3
Color Rendering Index	CRI>90
Power	21 W
Efficacy	109 Lm/W
LED lifespan	L80B10 >60.000h

LIGHT SOURCE

Lighting efficiency	90%
Delivered luminous flux	2070 Lm
Light beam angle	19°

LIGHTING FIXTURE | PHOTOMETRIC DATA

Power values of the system	23,70 W
Dimming	DALI

LIGHTING FIXTURE | ELECTRICAL DATA


Environmental location	DAMP
Track type	Black Foster Custom Surface Track
Weight	0.66 lb 300 gr
Packaged weight	0.88 lb 403 gr
Packaging dimensions	18.19x4.41x1.89 in 462x112x48 mm
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

OTHER DATA




Black Foster is the lighting fixture that transfers the applauded "Invisible Black" effect to a linear system. Black Foster is composed of a series of combinable modules enabling the alternation of segments with light emission and without light emission. However, whether it is ON or OFF, this luminaire always keeps the aesthetics of a perfect dark line. To the observer, it is impossible to distinguish between Black Foster parts that emit light from those that don't. Black Foster's modularity provides a wide range of different combinations, allowing to set up the light emission location as many times as needed, and adapting itself to the requirements of each project in particular.

POLAR DIAGRAM

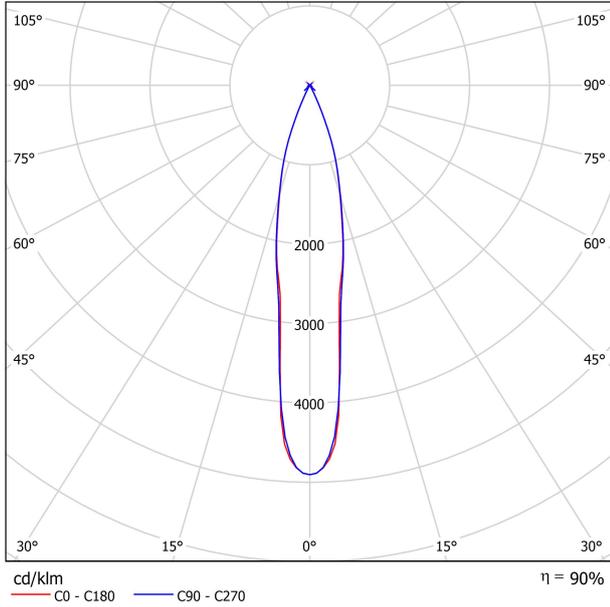


CONICAL DIAGRAM

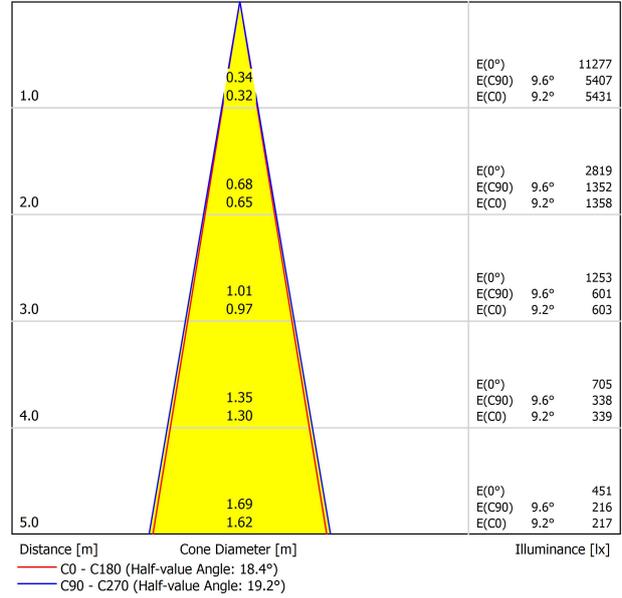

UGR

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	30
ρ Walls	50	30	50	30	30	50	30	50	30	30	30
ρ Floor	20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	3.2	3.8	3.4	4.0	4.2	3.7	4.4	3.9	4.5	4.7
	3H	6.4	7.0	6.6	7.2	7.4	7.2	7.8	7.4	8.0	8.2
	4H	8.2	8.8	8.5	9.0	9.3	9.1	9.7	9.4	10.0	10.2
	6H	10.3	10.8	10.6	11.1	11.4	11.4	11.9	11.7	12.2	12.4
	8H	11.4	11.9	11.7	12.2	12.5	12.6	13.1	12.9	13.4	13.7
4H	2H	4.4	5.0	4.7	5.3	5.5	4.8	5.4	5.1	5.6	5.9
	3H	7.8	8.3	8.2	8.6	8.9	8.5	9.0	8.8	9.3	9.6
	4H	9.8	10.2	10.2	10.6	10.9	10.6	11.0	10.9	11.3	11.7
	6H	12.0	12.4	12.4	12.7	13.1	13.0	13.3	13.4	13.7	14.0
	8H	13.2	13.5	13.6	13.9	14.3	14.3	14.6	14.7	15.0	15.4
8H	2H	4.4	5.0	4.7	5.3	5.5	4.8	5.4	5.1	5.6	5.9
	3H	7.8	8.3	8.2	8.6	8.9	8.5	9.0	8.8	9.3	9.6
	4H	9.8	10.2	10.2	10.6	10.9	10.6	11.0	10.9	11.3	11.7
	6H	12.0	12.4	12.4	12.7	13.1	13.0	13.3	13.4	13.7	14.0
	8H	13.2	13.5	13.6	13.9	14.3	14.3	14.6	14.7	15.0	15.4
12H	2H	4.4	5.0	4.7	5.3	5.5	4.8	5.4	5.1	5.6	5.9
	3H	7.8	8.3	8.2	8.6	8.9	8.5	9.0	8.8	9.3	9.6
	4H	9.8	10.2	10.2	10.6	10.9	10.6	11.0	10.9	11.3	11.7
	6H	12.0	12.4	12.4	12.7	13.1	13.0	13.3	13.4	13.7	14.0
	8H	13.2	13.5	13.6	13.9	14.3	14.3	14.6	14.7	15.0	15.4
12H	4H	11.0	11.3	11.4	11.7	12.1	11.5	11.8	11.9	12.2	12.6
	6H	13.5	13.7	14.0	14.1	14.6	14.2	14.4	14.6	14.8	15.3
	8H	15.0	15.2	15.5	15.6	16.1	15.8	16.0	16.3	16.4	16.9
	12H	16.1	16.3	16.6	16.8	17.3	17.2	17.3	17.7	17.8	18.3
	12H	16.1	16.3	16.6	16.8	17.3	17.2	17.3	17.7	17.8	18.3
Variation of the observer position for the luminaire distances S											
S = 1.0H	+0.2 / -0.1					+0.2 / -0.1					
S = 1.5H	+0.3 / -0.3					+0.3 / -0.3					
S = 2.0H	+0.5 / -0.5					+0.5 / -0.5					
Standard table Correction Summand	---					---					
Corrected Glare Indices referring to 2300lm Total Luminous Flux											


BLACK FOSTER CUSTOM UL



BLACK FOSTER CUSTOM SURFACE	3.28ft (1m) UL	U452-01-00-	NT	WT
BLACK FOSTER CUSTOM SURFACE	6.56ft (2m) UL	U452-02-00-	NT	WT


BLACK FOSTER CUSTOM COVER	Gap 250 UL	U452-00-01-	N	9.84 in / 250 mm
BLACK FOSTER CUSTOM COVER	Gap 500 UL	U452-00-02-	N	16.69 in / 500 mm

L




BLACK FOSTER CUSTOM SURFACE	L-Joint UL	U452-04-00-	NT	WT
BLACK FOSTER CUSTOM SURFACE	T-Joint UL	U452-05-00-	NT	WT
BLACK FOSTER CUSTOM SURFACE	X-Joint UL	U452-06-00-	NT	WT

BLACK FOSTER CUSTOM SURFACE L-Joint UL




Electrical connection not included

BLACK FOSTER CUSTOM SURFACE T-Joint UL



Electrical connection not included

BLACK FOSTER CUSTOM SURFACE X-Joint UL





Electrical connection not included

P V D

CONSTANT VOLTAGE	U100-00-78	96 W	48 V	8.16 x 2.97 x 1.30 in
LED POWER SUPPLY				207 x 75.4 x 33 mm

120 & 277V | 50/60 Hz

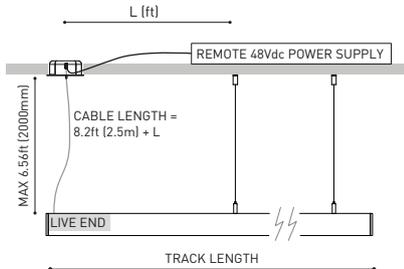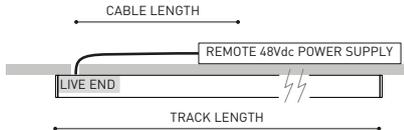

UL DROP VOLTAGE TABLE

POWER	CABLE SECTION	CABLE LENGTH			
		16.40ft 5m	32.80ft 10m	65.62ft 20m	98.43ft 30m
96 W	AWG16	TRACK LENGTH			
		164ft 50m	164ft 50m	131.32ft 40m	82ft 25m

COLOUR | N ■ | NT ■ | WT □ |

BLACK FOSTER CUSTOM UL

BLACK FOSTER CUSTOM TRACK COMPONENTS



BLACK FOSTER CUSTOM SURFACE
End UL U452-00-03- | N | W |

Cover thickness = 0.12in (3mm)




BLACK FOSTER CUSTOM SURFACE
End Feed UL U452-00-04- | N | W |

Cover thickness = 0.12in (3mm)




BLACK FOSTER CUSTOM SURFACE
Straight Joiner UL U452-00-05


CONNECTION COMPONENTS




Live-End Connector 48V UL
 U338-00-01- | N |




L-Joint Connector 48V UL
 U338-00-12- | N |



Central Connector 48V UL
 U338-00-02- | N |




T-Joint Connector 48V UL
 U450-00-07- | N |



X-Joint Connector 48V UL
 U450-00-08- | N |

SUSPENSION COMPONENTS



Black Foster Suspension Kit (2 Units) UL
 U450-00-09- | NT | WT |

Suggested Mounting accessories quantities
 3.28ft (1000mm) - 2 Pcs.
 6.56ft (2000mm) - 3 Pcs.



Suspension Feed Kit 48V UL
 U338-00-17- | N | W | DIM

*For remote power supply