




DIMENSIONS



AWARDS



| | |
|-----------|--|
| Name | BLACK FOSTER SURF 10 UL FLOOD 4000K WTMG |
| Reference | U3205012WTMG |
| Color | Textured white-Metallized gold |
| Category | SURFACE |

PRODUCT

| | |
|-----------------------|-----------------|
| Type | LED |
| Gross luminous flux | 2500 Lm |
| Color temperature | 4000 K |
| Chromatic stability | MacAdam Step 3 |
| Color Rendering Index | CRI>90 |
| Power | 21 W |
| Current | 700 mA |
| Efficacy | 119 Lm/W |
| LED lifespan | L80B10 >60.000h |

LIGHT SOURCE

| | |
|-------------------------|---------|
| Lighting efficiency | 92% |
| Delivered luminous flux | 2300 Lm |
| Light beam angle | 38° |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|----------------------------|--|
| Driver | Included: ERP-PSB series or similar |
| Power values of the system | 24,00 W |
| Frequency | 50/60 Hz |
| Dimming | 0-10V / TRIAC/ELV dimming only at 120V |

LIGHTING FIXTURE | ELECTRICAL DATA

| | |
|---------------------------------|---|
| Environmental location | DAMP |
| Junction box cover | Included. For octagonal Junction box |
| Junction box cover color | Textured white. Other finishing, please consult |
| Junction box cover measurements | Ø4.33 in Ø110 mm |
| Weight | 3.36 lb 1524 gr |
| Packaged weight | 4.70 lb 2134 gr |
| Packaging dimensions | Ø5.04x20.28 in Ø128x515 mm |
| Materials | Aluminium - Acrylonitrile Butadiene Styrene - Polycarbonate |

OTHER DATA




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM



CONICAL DIAGRAM

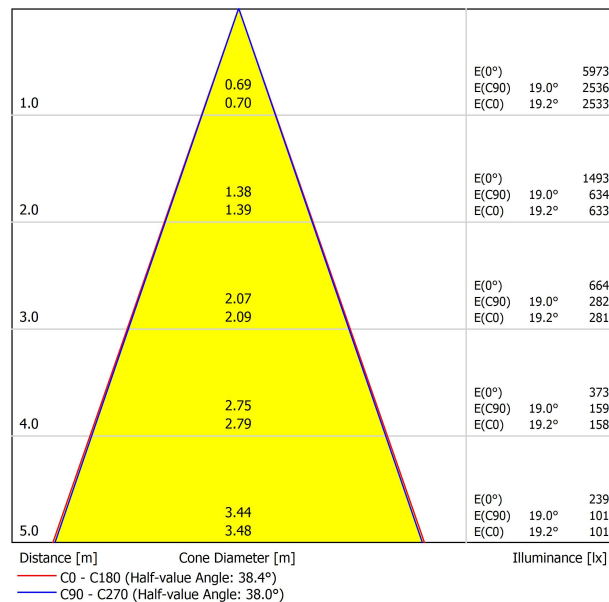

UGR

| Glare Evaluation According to UGR | | | | | | | | | | | |
|--|-----|---|-------|-------|-------|-------|--|-------|-------|-------|-------|
| ρ Ceiling | | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 |
| ρ Walls | | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 |
| ρ Floor | | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | |
| 2H | 2H | -12.9 | -12.2 | -12.6 | -12.0 | -11.8 | -13.7 | -13.1 | -13.5 | -12.9 | -12.7 |
| | 3H | -6.6 | -6.0 | -6.3 | -5.7 | -5.5 | -6.4 | -5.9 | -6.2 | -5.6 | -5.4 |
| | 4H | -3.0 | -2.5 | -2.7 | -2.2 | -2.0 | -2.5 | -2.0 | -2.2 | -1.7 | -1.4 |
| | 6H | 0.6 | 1.1 | 0.9 | 1.4 | 1.7 | 1.0 | 1.5 | 1.3 | 1.7 | 2.0 |
| | 8H | 2.4 | 2.9 | 2.8 | 3.2 | 3.5 | 2.8 | 3.2 | 3.1 | 3.5 | 3.8 |
| 4H | 12H | 4.4 | 4.9 | 4.8 | 5.2 | 5.5 | 4.8 | 5.3 | 5.1 | 5.6 | 5.9 |
| | 2H | -10.3 | -9.8 | -10.0 | -9.5 | -9.2 | -10.7 | -10.1 | -10.4 | -9.9 | -9.6 |
| | 3H | -4.3 | -3.9 | -4.0 | -3.6 | -3.3 | -4.1 | -3.7 | -3.8 | -3.4 | -3.1 |
| | 4H | -0.9 | -0.5 | -0.5 | -0.2 | 0.2 | -0.5 | -0.1 | -0.1 | 0.3 | 0.6 |
| | 6H | 2.7 | 3.0 | 3.1 | 3.3 | 3.7 | 3.0 | 3.3 | 3.4 | 3.6 | 4.0 |
| 8H | 8H | 4.5 | 4.8 | 4.9 | 5.2 | 5.6 | 4.8 | 5.1 | 5.2 | 5.5 | 5.9 |
| | 12H | 6.6 | 6.8 | 7.0 | 7.2 | 7.6 | 6.9 | 7.1 | 7.3 | 7.5 | 7.9 |
| | 4H | 0.6 | 0.9 | 1.0 | 1.3 | 1.7 | 0.9 | 1.2 | 1.3 | 1.6 | 2.0 |
| | 6H | 4.3 | 4.5 | 4.7 | 4.9 | 5.4 | 4.5 | 4.7 | 4.9 | 5.1 | 5.6 |
| | 8H | 6.2 | 6.4 | 6.7 | 6.9 | 7.3 | 6.4 | 6.6 | 6.9 | 7.1 | 7.5 |
| 12H | 12H | 8.4 | 8.6 | 8.9 | 9.0 | 9.5 | 8.7 | 8.8 | 9.2 | 9.3 | 9.8 |
| | 4H | 1.2 | 1.4 | 1.6 | 1.8 | 2.2 | 1.4 | 1.6 | 1.8 | 2.0 | 2.5 |
| | 6H | 4.9 | 5.0 | 5.3 | 5.5 | 6.0 | 5.0 | 5.2 | 5.5 | 5.7 | 6.1 |
| | 8H | 6.9 | 7.1 | 7.4 | 7.5 | 8.0 | 7.1 | 7.3 | 7.6 | 7.7 | 8.2 |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | |
| S = 1.0H S = 1.5H S = 2.0H | | +0.9 / -0.3 +1.9 / -0.6 +3.1 / -0.8 | | | | | +1.3 / -0.4 +2.7 / -0.7 +4.2 / -1.0 | | | | |
| Standard table | | | | | | | | | | | |
| Correction | | --- | | | | | --- | | | | |
| Summand | | --- | | | | | --- | | | | |
| Corrected Glare Indices referring to 2500lm Total Luminous Flux | | | | | | | | | | | |