




**DIMENSIONS**

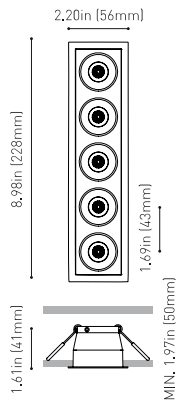

|                  |                                     |
|------------------|-------------------------------------|
| <b>Name</b>      | BLACK FOSTER REC 5 UL FLOOD 4000K N |
| <b>Reference</b> | U3194012N                           |
| <b>Color</b>     | Matt black                          |
| <b>Category</b>  | CEILING RECESSED                    |

**PRODUCT**

|                              |                                      |
|------------------------------|--------------------------------------|
| <b>Type</b>                  | LED                                  |
| <b>Gross luminous flux</b>   | Depending on Mounting Accessories Lm |
| <b>Color temperature</b>     | 4000 K                               |
| <b>Chromatic stability</b>   | MacAdam Step 3                       |
| <b>Color Rendering Index</b> | CRI>90                               |
| <b>Power</b>                 | Depending on Mounting Accessories W  |
| <b>Current</b>               | Depending on Mounting Accessories mA |
| <b>LED lifespan</b>          | L80B10 >60.000h                      |

**LIGHT SOURCE**

|                            |     |
|----------------------------|-----|
| <b>Lighting efficiency</b> | 92% |
| <b>Light beam angle</b>    | 38° |

**LIGHTING FIXTURE | PHOTOMETRIC DATA**

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| <b>Driver</b>                     | Requires remote driver            |
| <b>Power values of the system</b> | W                                 |
| <b>Dimming</b>                    | Depending on Mounting Accessories |

**LIGHTING FIXTURE | ELECTRICAL DATA**

|                               |   |
|-------------------------------|---|
| <b>Environmental location</b> | DAMP  |
| <b>Weight</b>                 | 0.75 lb   340 gr                            |
| <b>Packaged weight</b>        | 0.96 lb   435 gr                            |
| <b>Packaging dimensions</b>   | 10.35x4.09x2.17 in   263x104x55 mm          |
| <b>Units per package</b>      | 1   |
| <b>Materials</b>              | Aluminium / Acrylonitrile Butadiene Styrene |

**OTHER DATA**




**AWARDS**




Black Foster is the product that transfers the claimed effect " The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.



POLAR DIAGRAM

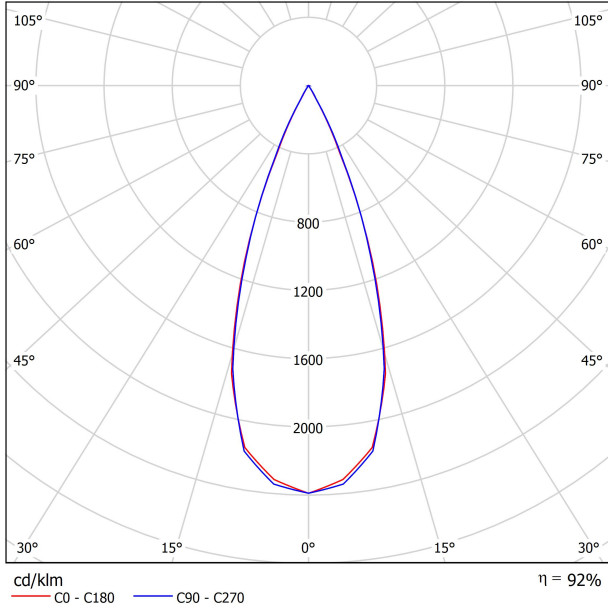

CONICAL DIAGRAM

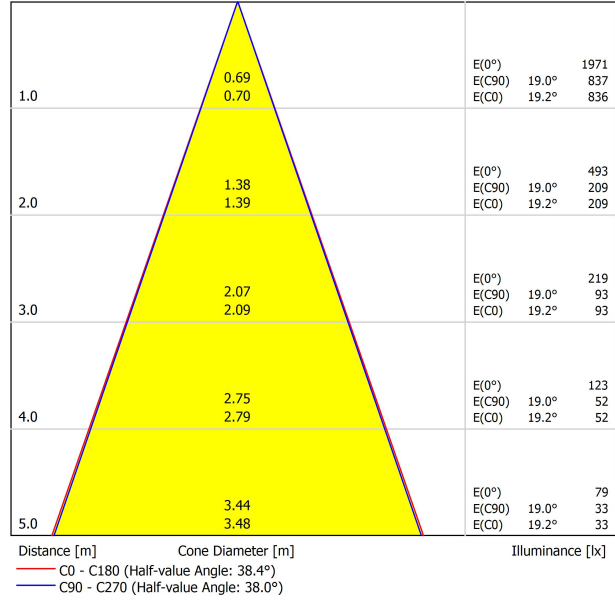

UGR

| Glare Evaluation According to UGR                                |             |  |       |       |       |             |   |       |       |       |       |
|--|-------------|--|-------|-------|-------|-------------|---|-------|-------|-------|-------|
| ρ Ceiling  | 70          | 70   | 50    | 50    | 30    | 70          | 70                                      | 50    | 50    | 30    | 30    |
| ρ Walls  | 50          | 30   | 50    | 30    | 30    | 50          | 30                                      | 50    | 30    | 30    | 30    |
| ρ Floor  | 20          | 20   | 20    | 20    | 20    | 20          | 20                                      | 20    | 20    | 20    | 20    |
| Room Size X Y  |             | Viewing direction at right angles to lamp axis |       |       |       |             | Viewing direction parallel to lamp axis |       |       |       |       |
| 2H   | 2H          | -14.2  | -13.6 | -14.0 | -13.4 | -13.2       | -15.1                                   | -14.5 | -14.9 | -14.3 | -14.1 |
|  | 3H          | -8.0   | -7.4  | -7.7  | -7.2  | -6.9        | -7.8                                    | -7.2  | -7.6  | -7.0  | -6.8  |
|  | 4H          | -4.5   | -3.9  | -4.2  | -3.7  | -3.4        | -3.9                                    | -3.4  | -3.6  | -3.1  | -2.8  |
|  | 6H          | -0.8   | -0.3  | -0.5  | -0.0  | 0.3         | -0.4                                    | 0.1   | -0.1  | 0.3   | 0.6   |
|  | 8H          | 1.0  | 1.5   | 1.4   | 1.8   | 2.1         | 1.4                                     | 1.9   | 1.7   | 2.1   | 2.4   |
| 12H  | 3.0         | 3.5  | 3.4   | 3.8   | 4.1   | 3.4         | 3.9                                     | 3.7   | 4.2   | 4.5   |       |
| 4H   | 2H          | -11.7  | -11.1 | -11.4 | -10.9 | -10.6       | -12.1                                   | -11.5 | -11.8 | -11.3 | -11.0 |
|  | 3H          | -5.7   | -5.3  | -5.4  | -5.0  | -4.7        | -5.6                                    | -5.1  | -5.2  | -4.8  | -4.5  |
|  | 4H          | -2.3   | -1.9  | -1.9  | -1.6  | -1.2        | -1.9                                    | -1.5  | -1.5  | -1.1  | -0.8  |
|  | 6H          | 1.3  | 1.6   | 1.7   | 1.9   | 2.3         | 1.6                                     | 1.9   | 2.0   | 2.2   | 2.6   |
|  | 8H          | 3.1  | 3.4   | 3.5   | 3.8   | 4.2         | 3.4                                     | 3.7   | 3.8   | 4.1   | 4.5   |
| 12H  | 5.2         | 5.4  | 5.6   | 5.8   | 6.2   | 5.5         | 5.7                                     | 5.9   | 6.1   | 6.6   |       |
| 8H   | 4H          | -0.8   | -0.5  | -0.4  | -0.1  | 0.3         | -0.5                                    | -0.2  | -0.1  | 0.2   | 0.6   |
|  | 6H          | 2.9  | 3.1   | 3.3   | 3.5   | 4.0         | 3.1                                     | 3.3   | 3.5   | 3.7   | 4.2   |
|  | 8H          | 4.8  | 5.0   | 5.3   | 5.5   | 5.9         | 5.0                                     | 5.2   | 5.5   | 5.7   | 6.1   |
|  | 12H         | 7.0  | 7.2   | 7.5   | 7.6   | 8.1         | 7.3                                     | 7.4   | 7.8   | 7.9   | 8.4   |
| 12H  | 4H          | -0.3   | -0.0  | 0.2   | 0.4   | 0.8         | -0.0                                    | 0.2   | 0.4   | 0.6   | 1.1   |
|  | 6H          | 3.5  | 3.6   | 3.9   | 4.1   | 4.6         | 3.6                                     | 3.8   | 4.1   | 4.3   | 4.7   |
|  | 8H          | 5.5  | 5.7   | 6.0   | 6.1   | 6.6         | 5.7                                     | 5.9   | 6.2   | 6.3   | 6.8   |
| Variation of the observer position for the luminaire distances S |             |  |       |       |       |             |   |       |       |       |       |
| S = 1.0H   | +0.9 / -0.3 |  |       |       |       | +1.3 / -0.4 |   |       |       |       |       |
| S = 1.5H   | +1.9 / -0.6 |  |       |       |       | +2.7 / -0.7 |   |       |       |       |       |
| S = 2.0H   | +3.1 / -0.8 |  |       |       |       | +4.2 / -1.0 |   |       |       |       |       |
| Standard table Correction Summand                                | ---         |  |       |       |       | ---         |   |       |       |       |       |
| Corrected Glare Indices referring to 825lm Total Luminous Flux   |             |  |       |       |       |             |   |       |       |       |       |